


**CROWN CAPITAL ENTERPRISE
LIMITED**

WANCHAI, HONG KONG

**Demonstration of RJSeal™
East Harbour Tunnel,
Hong Kong**

October & November 2004



**TS² Consulting Inc.
Lamma, Hong Kong**

CROWN CAPITAL ENTERPRISE LIMITED

Demonstration of RejuvaSeal Trans European Motorway, Corlu, Turkey

June 2002

TABLE OF CONTENTS

Section	Description	Page
1.0	Introduction	1
2.0	Co-operative Program	3
3.0	RejuvaSeal™	4
3.1	Prior Experience	4
4.0	Test Program	5
4.1	RejuvaSeal™ Testing	15
4.2	Water Dissipation	15
4.3	Fuel Resistance Testing	17
4.4	Elasticity/Ductility Testing	17
5.0	Project Completion Schedule	18

FIGURES

No.	Description	Page
1.0	General Location Map	2
4.0	Specific Location Map	7
4.1	Test Patches At Demonstration Site	8
4.2	Typical Application Procedure	12
4.3	Finished RejuvaSeal Application	13
4.4	Roller for Completion of Application	14
4.5	Humble Equipment Co. Outflow Meter	16
5.0	Project Completion Schedule	19

TABLES

No.	Description	Page
4.1	Geographic Location of Test Patch	5
4.2	Details of Test Patch on Trans European Motorway	5
4.3	Geographic Location of Demo Site	9
4.4	Details of RejuvaSeal™ Demonstration Section on Trans European Motorway	10
4.5	Outflow Meter readings at Demo Site	15

CROWN CAPITAL ENTERPRISE LIMITED

Demonstration of RejuvaSeal Trans European Motorway, Corlu, Turkey

June 2001

APPENDICES

No.	Description
A	Rejuvaseal™ – Technical Seminar, Istanbul, Turkey, June 2002
B	Rejuvaseal Descriptive Literature



**TS² Consulting Inc.
Lamma, Hong Kong**

TS² CONSULTING INC. <


(British Virgin Islands Incorporated) website: <http://ts2.stormloader.com>

China (Office)

4th Floor, Bldg No. 042,
Shang Xian Lu
San Liao, Wang Jiang
HuiZhou, Guangdong,
P.R. China, 516003
Phone: (86-752)-281-3573
Mobile: (86)-1362-949-8994
Peoples Republic of China, 516003
Email: speed_cny@yahoo.co.uk

Hong Kong (Liaison Office)

2/F 81 Po Wah Yuen,
Lamma Island,
Hong Kong
Phone (85-2)-2142-3500
Fax: (85-2)-2390-5465
Cellular: (85-2)-9157-6693
Email: speed_cny@yahoo.co.uk



中国云南省昆明市虹山东路147号景秀庄园3-5-201

November 15, 2004

INSPECTION OF EASTERN HARBOUR TUNNEL

1. General Scope of Work

The intent of this report was to inspect the asphalt pavement of the Eastern Harbour Tunnel and evaluate the application of RJSealTM at the Number 14 Toll Booth on Kowloon side, the Kowloon Entrance area, the Immersed Tube Tunnel and the South-End at Quarry Bay.

2. General Conditions of the Asphalt Road Surface

The Eastern Harbour Tunnel is operated by the New Hong Kong Tunnel Company Limited (NHKTC). Figure 1 (including 1a to 1f) shows the general location. The records of NHKTC indicates a high traffic volume passing thru the tunnel, which is estimated at more than 80,000 vehicles per day.

2.1 Auto Toll Booth Number 14

Figure 2 (including 2a to 2d) illustrates the location of two demo strips that were undertaken in proximity to Toll Booth Number 14, located at the Kowloon side of the facility. This toll booth is unmanned and serves as an automatic toll collector for heavy vehicles, such as buses and trucks which travel to Hong Kong Island. Immediately in front of the toll booth, a 15-metre long strip (2 metre wide) was treated with RJSealTM on March 5, 2004 for demonstration purposes. Similarly a 15-metre long demo strip was completed immediately after the concrete apron beside Toll Booth No 14.

The asphalt pavement at this location is a Stone Matrix Asphalt (SMA) with 25 mm aggregate at the tollbooth. Normally the pavement fails quite quickly in proximity to the tollbooths and is completely replaced every 6 to 9 months, due to the excessive traffic of heavily loaded vehicles. This is attributable to the fact, that all vehicles usually would slow down or brake in front of the Auto Toll Booth and then resume their speed, thus adding dynamic loading to the heavy static load of these vehicles, resulting in short life span of the asphalt road at about 6 to maximum 9 months. After more than 6 months, the site observation and experience with these two demo strips shows that RJSeal™ has extended the life of the asphalt pavement and still shows no significant sign of fatigue, whilst on the other side of the road surface where no RJSeal was applied, cracks are evident.

2.2 Entrance Area

The entrance to the tunnel descends at a gradient of approximately 6% and this portion had extensive problems, with water ingress from sidewalls and floor. See [Figure 3](#) for a graphic illustration of water ingress, through a porous area in the floor. Shortly after the opening of the Eastern Harbour Tunnel for service, the operating company had to install supplemental drainage down the centre of the tube (between the two driving lanes) with branch lines to the side of the tube for collection of nuisance water.

Furthermore, water percolating down the exterior skin of the tube and then arising at porous portions of the asphalt overlay results in erosion of the bitumen binder and eventually leads to the formation of honeycomb asphalt and thence potholes and local failure of the asphalt pavement. These potholes are cut out and patched on a periodic basis.

The drainage system that was retrofitted, post-completion also has presented some maintenance problems due to flexure of the asphalt pavement that overlies the cross drains from the central collector. See [Figure 4](#) for illustration of the asphalt failure at the cross drain. This is especially prominent in the initial portion of the tunnel at the decline on the way down to the level central portion. Inspection of the asphalt pavement in the central portion shows no significant problems, although in the wheel path of both lanes, there is a raveling (loss of fines and exposure of the stone matrix).

See [Figure 5](#) illustrating the exposure of the stone matrix. At the present time, the exposed stones have sufficient bitumen binder to hold them in place, but it is suspected that in the next year, some maintenance material should be applied to rejuvenate the bitumen, which is now quite stiff. Attempts to dig into asphalt pavement with a pocketknife indicate that the bitumen binder is now quite inflexible.

2.3 Immersed Tube Portion

The two-lane, southbound tube of the tunnel was inspected, which at the time was closed to vehicular traffic, as various maintenance activities were underway. In the immersed tube portion of the Eastern Harbour Tunnel, the asphalt pavement is the original pavement dating from completion of the tunnel in 1987/88. An SMA pavement, with 10 millimetre-sized stone was used in the tunnel.

The appearance of the majority of the asphalt pavement in the central portion of the immersed tube suggest that some preventive maintenance measures will be required within the next year, to ensure that it continues to provide trouble-free service.

2.4 South-End at Quarry Bay

At the Quarry Bay end of the tunnel, in immediate proximity, where the spiral exit ramp is located, inspection of the porous frictional course (PFC) asphalt pavement material showed that several areas had been repaved. Some segments were three years old and current maintenance plans called for milling and repaving shortly. Adjoining areas had asphalt pavement that was two years old which appeared to have a raveling problem (loss of fines had occurred). Some portions were only one year old and still looked remarkably functional. Given the current experience and high traffic volumes in the southbound tube, the asphalt road probably would not last more than three years.

Given the current plans to replace the three year old pavement at the Quarry Bay exit, which has raveling problems in the wheel path, especially on the outside portion of the exit ramp (with some coarse material loss), an experiment was proposed whereby RJSeal™ would be applied to the one, two and three year old asphalt pavement. This experiment was carried out on 30 September 2004, due to the qualified success of the demonstration of RJSeal™ in May 2004, adjacent to Toll Booth No. 14.

3. Test Methods

The following test procedures were implemented to test the asphalt pavement. Figure 6 shows the suggested type of equipment that can be used for the various test procedures. Comparisons were undertaken at several locations on both the untreated and RJSeal™ treated sections (see Figure 7).

3.1 Macrotexture Depth

The sand patch test (ASTM Standard E965-96 OR China Standard T 0961-95) was used to ascertain the Pavement Macrotexture Depth. It reflects the roughness of the surface. By comparisons, it would show that the RJSeal application should not affect the macrotexture depth.

3.2 Water Penetration

Water Penetration Tests (China Testing Standard T 0730-2000) were undertaken at several locations on the untreated portion of the road, in close proximity to the test strips and later on the RJSeal™ treated section. For porous friction coarse, the water should flow through before and after the RJSeal treatment.

3.3 Hydroplaning Potential

An "Outflow Meter" manufactured in the U.S.A. by Humble Equipment Company of Ruston, Louisiana and sold under the trademark "Outflow Meter" was used to measure and compare the relativity of the asphalt pavement's macrotexture, to ascertain the hydroplaning potential on the RJSeal™ treated surface, versus the untreated surface. The procedure is documented in the ASTM working paper, WK-364. The Outflow Meter gives readings in seconds for the dissipation of a known quantity of water. It is suggested that any readings between 3 and 10 seconds are excellent and readings less than 15 seconds are satisfactory for an asphalt pavement surface, if hydroplaning is to be minimized.

These aforesaid tests are not damaging to the pavement as they don't require core samples to be taken, which could create potential trouble spots for pavement maintenance. The asphalt pavement can be monitored and allow comparison between the RJSeal treated asphalt pavement and the untreated pavement.

4. Test Results

4.1 Auto Toll Booth Number 14

There is no better test of a product than the reality of its application. The two test patches before and after the Auto Tollbooth were put into service in March and for more than six month, under non-stop daily service under the severe weather of the rainy season in this semi-tropical place from March till September. The traffic records indicate that more than 1.2 million vehicles passed through the Auto Tollbooth alone during the 6 month period ending September 5, 2004. This included 25,000 heavy goods vehicles, 64,000 single-decker buses and 300,000 double-decker buses.

The untreated road surface showed cracks and signs of structural failure. It has to be replaced. Yet when the author went to the site in September and again in early November, the treated surface still showed no sign of fatigue or failure and raveling was negligible, as no fine loss was observed. The test proves that it can withstand the static load and induced live load of the vehicles whilst braking and accelerating.

4.2 South End at Quarry Bay (porous friction coarse surface)

Location			
1 year Old Surface	Untreated Surface	Treated Surface	Remarks
• Macrotexture Depth	0.93 mm	0.93 mm	Test Nos. 13-16
• Water penetration	100 ml/min	685 ml/min	Test Nos. 13-16
• Hydroplaning potential	4 seconds	4seconds	Test Nos. 13-16
2 year Old Surface	Untreated Surface	Treated Surface	Remarks
• Macrotexture Depth	0.98-1.24 mm	1.04-1.24 mm	Test Nos. 1-12
• Water penetration	480 ml/min	160-960 ml/min	Test Nos. 1,3,4,6
• Hydroplaning potential	4 seconds	3 seconds	Test Nos. 7,10
3 year Old Surface	Untreated Surface	Treated Surface	Remarks
• Macrotexture Depth	0.42-0.48 mm	0.41-0.47 mm	Test Nos. 7,10
• Water penetration	117 ml/min	135 ml/min	Test Nos. 7,10
• Hydroplaning potential	2 seconds	2 seconds	Test Nos. 7,10

5. Conclusion and Recommendations

The tests show that the applications of RJSeal will not alter the macrotexture of the asphalt surface, which is closely related to the surface friction.

For general asphalt road surface, it helps seal the surface to prevent water damage to the substructures by rejuvenating the old asphalt. Since RJSeal tackles only bitumen and not fill in the space like crack sealant, the tests prove that RJSeal does not affect the water permeability of the porous friction coarse (PFC). In fact, in some cases, it helps improve the water permeability.

The hydroplaning potential tests handle the relativity of the macrotexture and the surface friction of the RJSeal treated surface versus the untreated surface. All the tests shows no changes, thus proving that the RJSeal would not alter, either increase nor decrease the surface friction of the asphalt road surface.

The tests also prove that the road can be opened to traffic four hours after the RJSeal application.

5.1 Toll Booth Area

The demonstration proves that RJSeal can stabilize the new asphalt and in fact improve the resistance to flexure cracking due to the high volume of traffic with heavily loaded vehicles, whilst not losing its ductility.

The phenomena suggest that the life span of asphalt road surface of the toll booth area can definitely be extended through the application of RJSeal.

Since there is no extensive data to identify how long the life span can be extended, the test result does suggest that RJSeal should be applied at the toll booth area at least once every 6 months. As such, it is believed that the life span of the road surface can last at least two to three more cycles, say 18 months.

5.2 Entrance Area

The general inspection of the entire Kowloon side toll area including the entrance area also suggests that some preventive measures must be undertaken in the near future to prevent further serious road surface deterioration of the structures.

5.3 Immersed Tube Portion

The general inspection indicates that the road surface condition is still acceptable. However, hairline cracks can still be spotted and fine loss occurs. It was informed that the asphalt pavement is still the original pavement dating from completion of the tunnel in 1987/88.


The appearance of the majority of the asphalt pavement in the central portion of the immersed tube suggests that some preventive maintenance measures will be required within the next year, to ensure that it continues to provide trouble-free service. The author prefers a well-planned preventive maintenance to ensure no emergency maintenance

5.4 South-End at Quarry Bay

Porous friction coarse is a type of asphalt pavement that is very open to conduct water away from the surface and provide a surface with superior skid resistance. The tests prove that RJSeal would improve the performance of PFC.

The asphalt sections in this area appear to last around three years. It is not suggested to apply RJSeal to the three-year-old section, as by that time it has deteriorated and has to be repaved. However the application of RJSeal once every year on a two year old asphalt surface should extend the life span of the road surface. Based on the trial experience, it should extend the life of the PFC, some two to three years.

Sincerely



Anthony G. Speed, P.Eng. (Ontario and New Brunswick, Canada)

Enclosures: Figures 1 (1a-1f), 2 (2a-2d), 3, 4, 5, 6 & 7

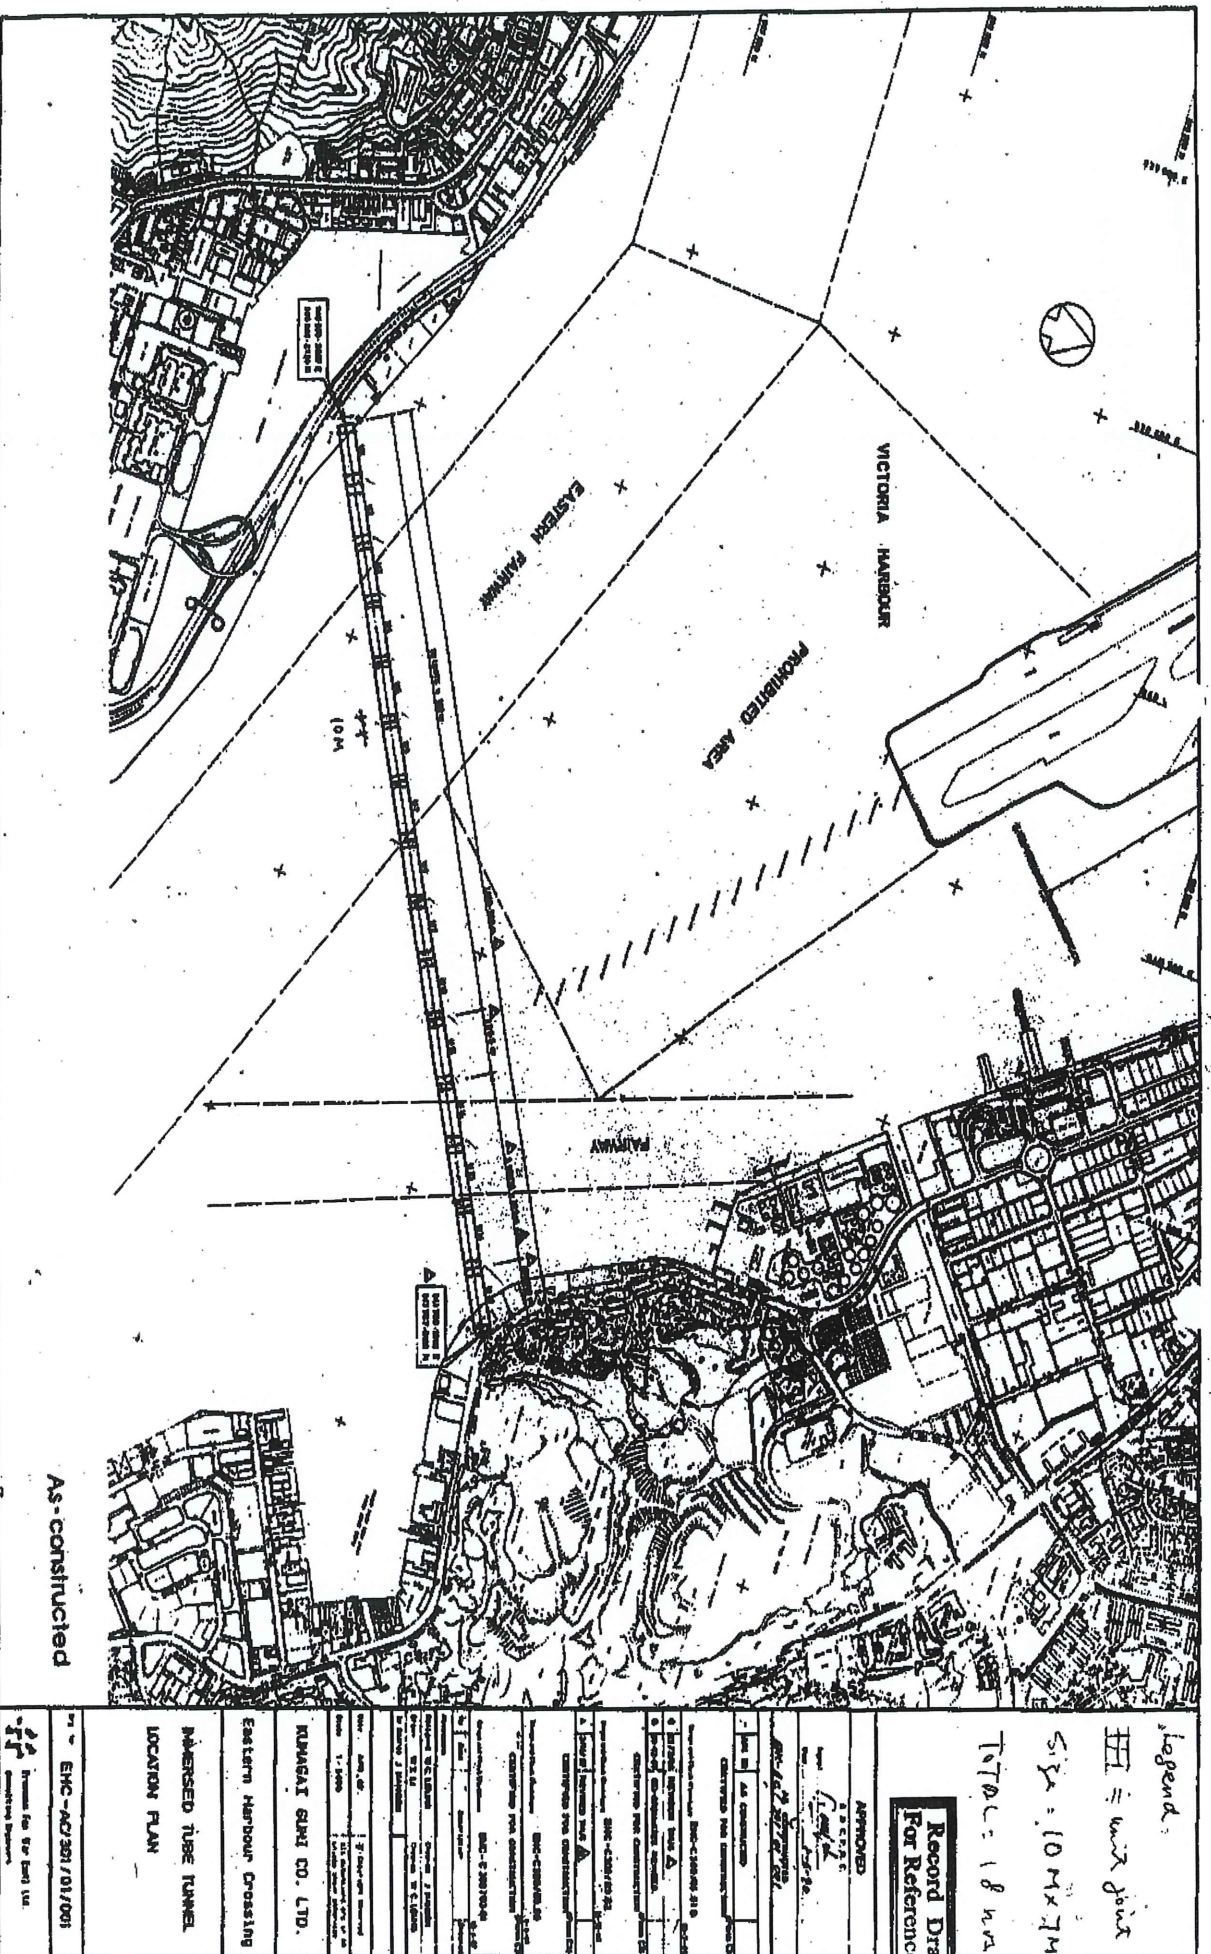
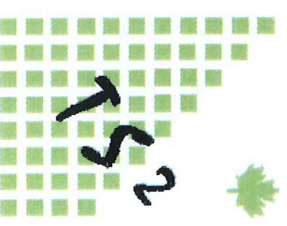


Figure 1 - Location Plan of East Harbour Tunnel

152



Figure 1a - HK Side Portal of East Harbour Tunnel



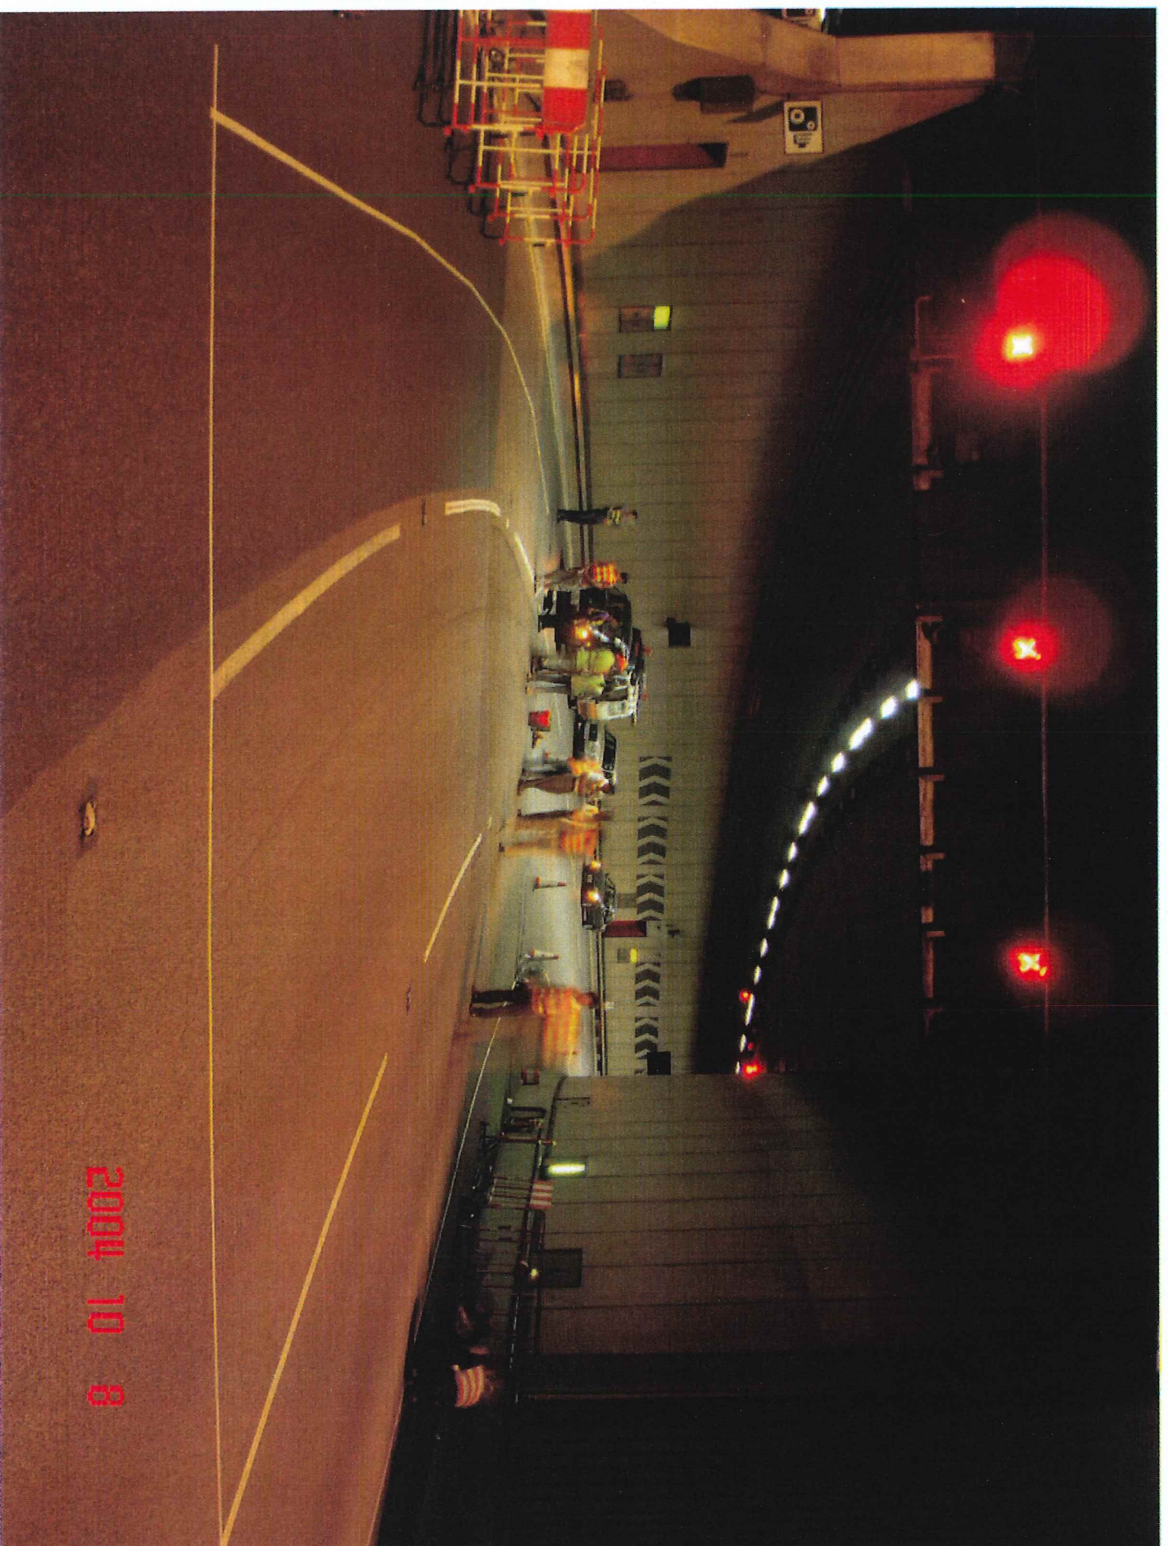
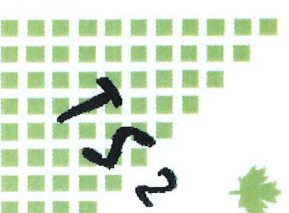


Figure 1b - HK Side Portal of East Harbour Tunnel



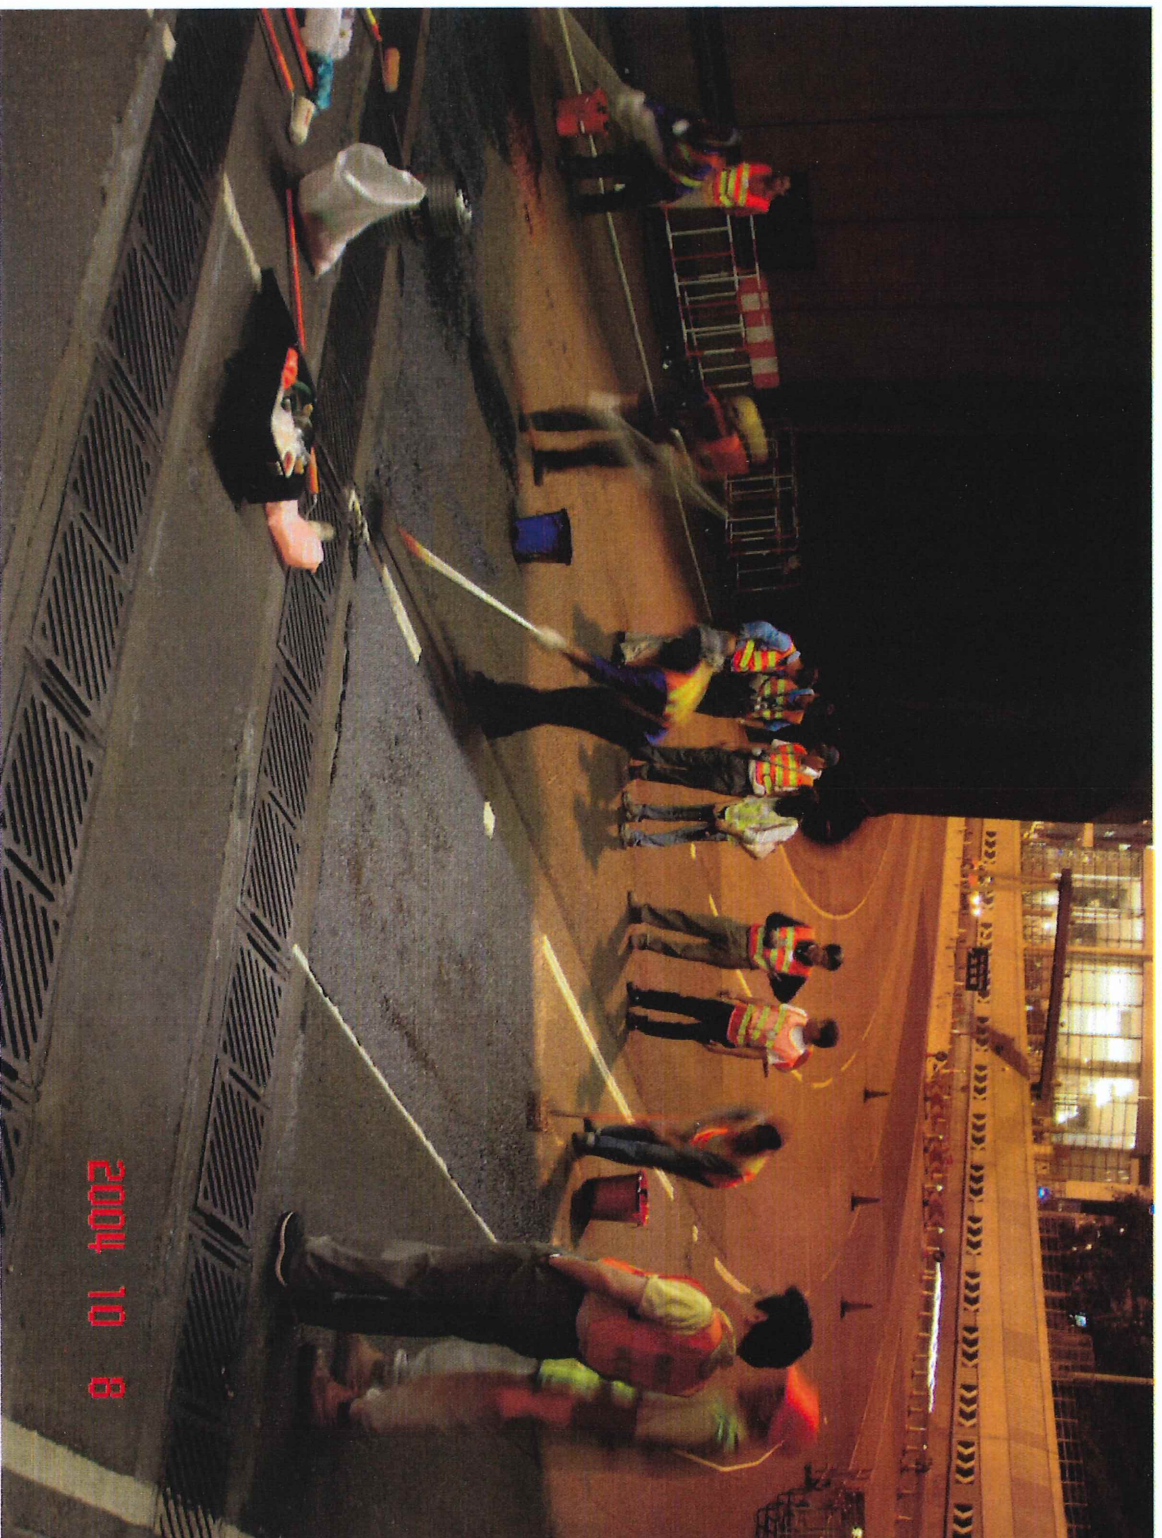


Figure 1c - HK Side Portal of East Harbour Tunnel

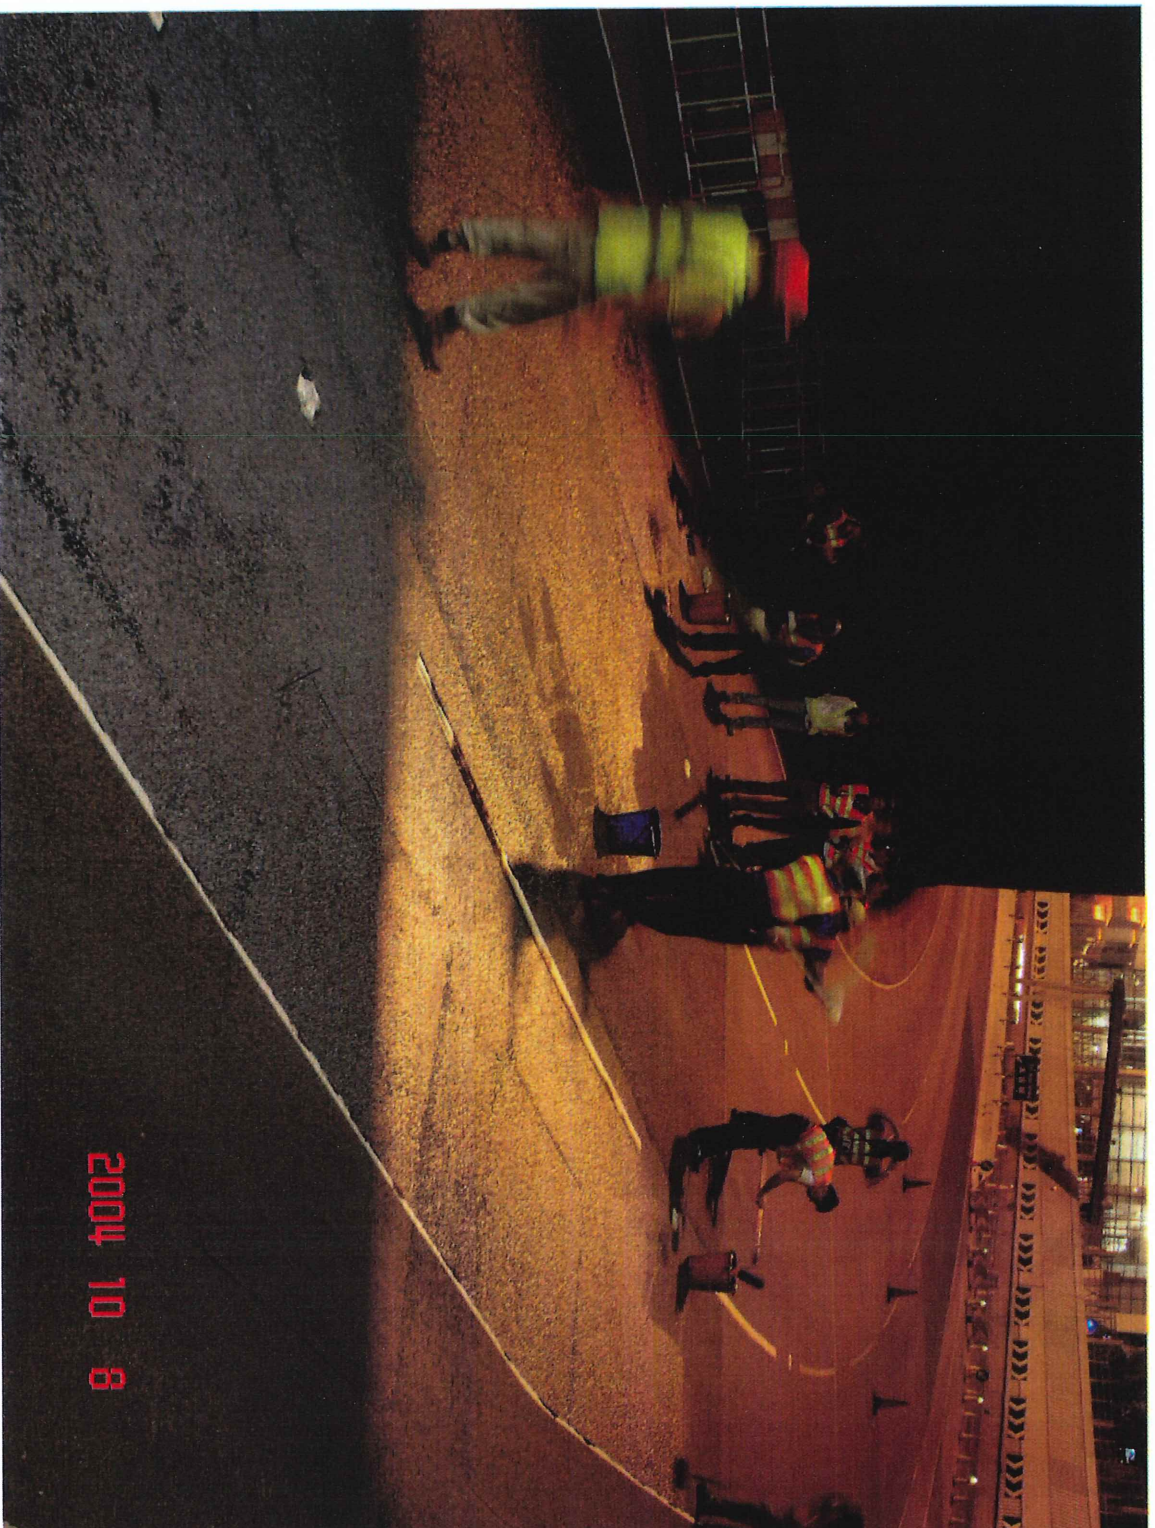
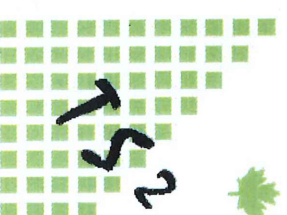


Figure 1d - HK Side Portal of East Harbour Tunnel



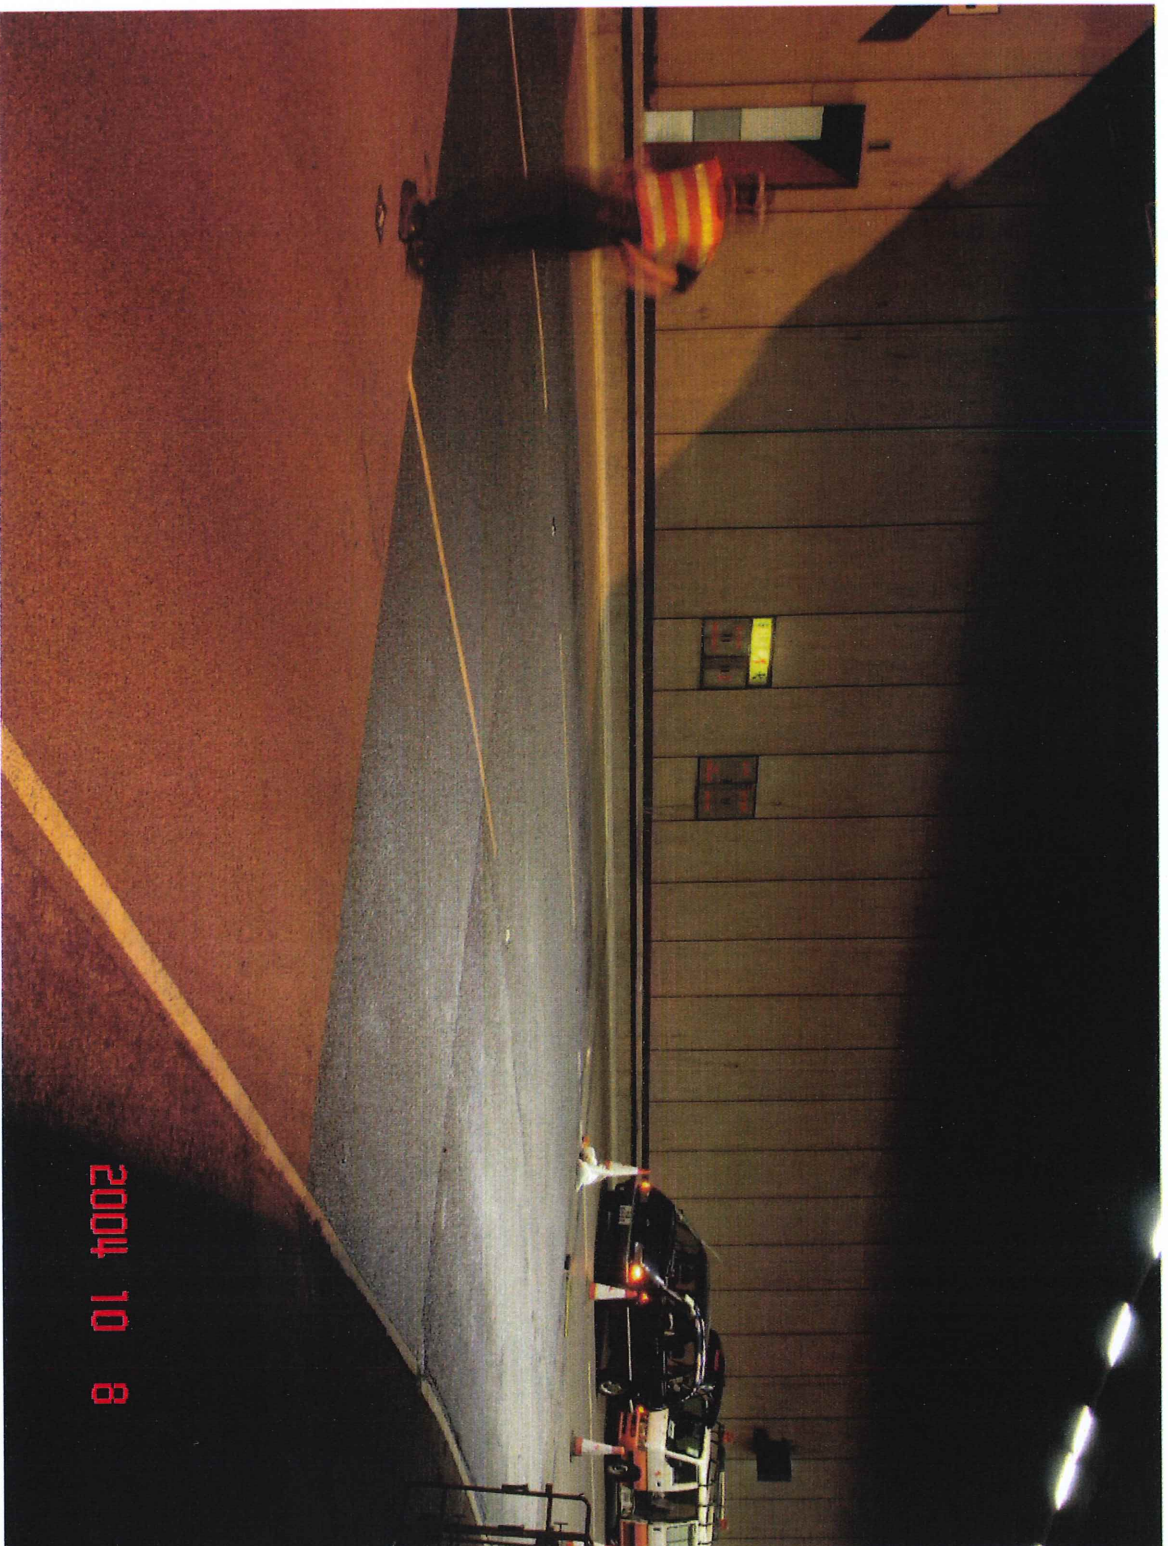
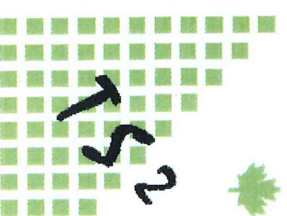


Figure 1e - HK Side Portal of East Harbour Tunnel



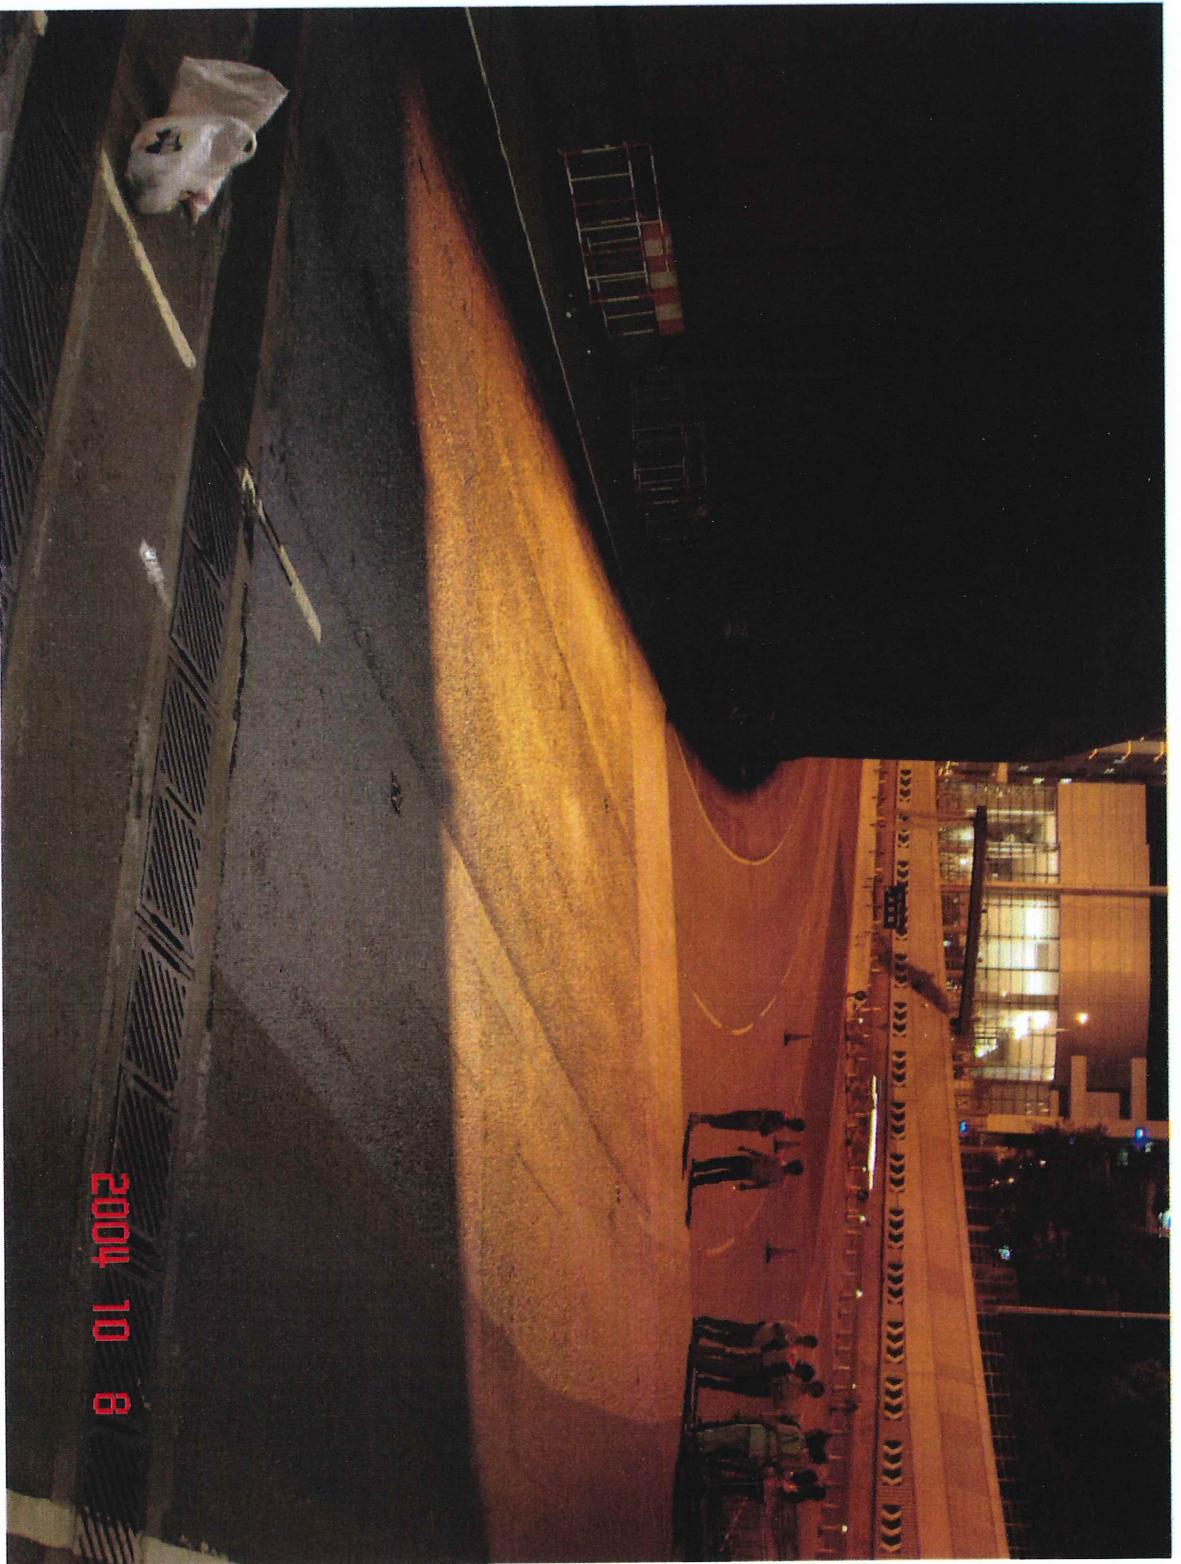


Figure 1f - HK Side Portal of East Harbour Tunnel

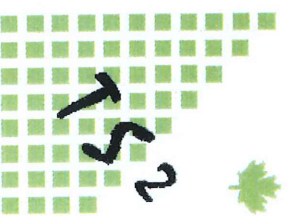




Figure 2 - Test Strip of March 5, 2004
in front of Toll Booth No. 14

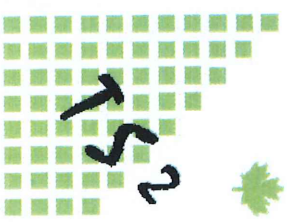




Figure 2a - Test Strip of March 5, 2004
in front of Toll Booth No. 14

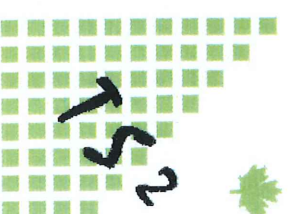




Figure 2b - Test Strip of March 5, 2004
in front of Toll Booth No. 14



Figure 2c - Test Strip of March 5, 2004
in front of Toll Booth No. 14

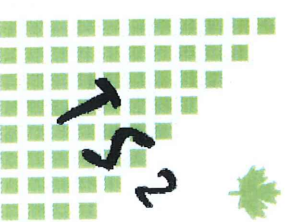




Figure 2d - Test Strip of March 5, 2004
in front of Toll Booth No. 14



Figure 3 - Water Seepage from Floor

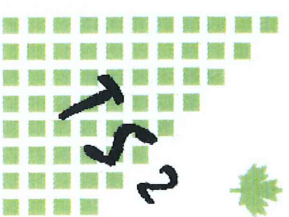




Figure 4 - Damaged Asphalt at Cross Drain

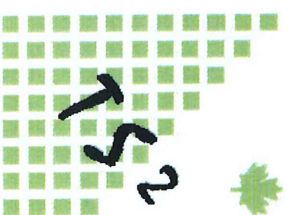
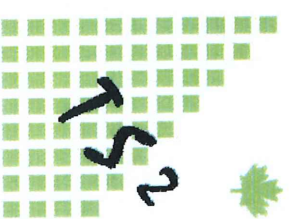




Figure 5 - Exposed Pebbles in Asphalt Pavement



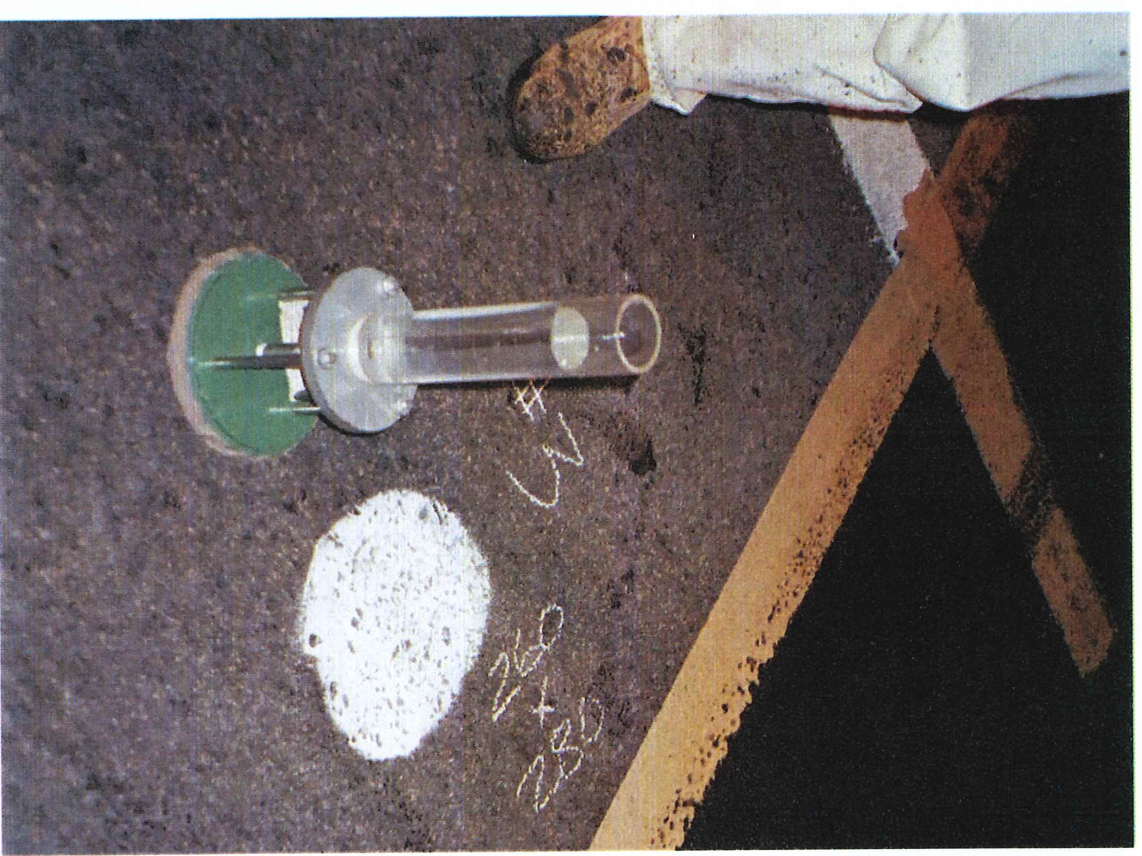


Figure 6 - Humble Equipment Co. Outflow Meter
Water Penetration Meter & Sand Patch Test


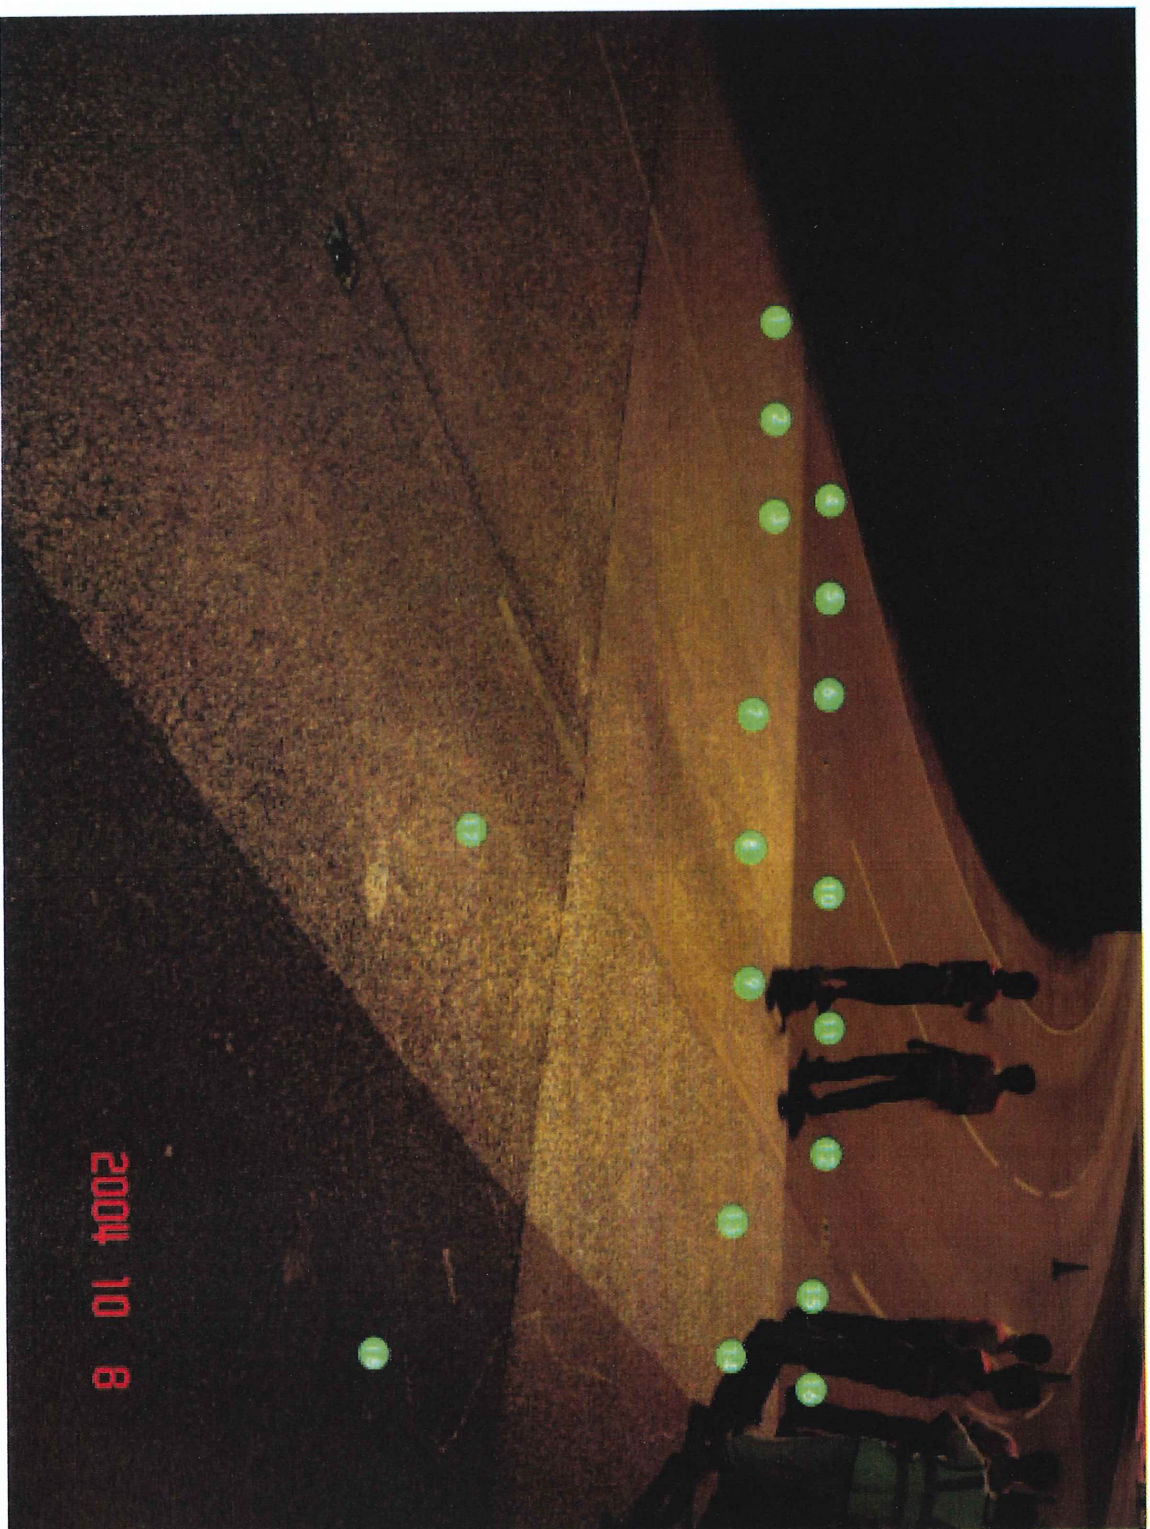


Figure 7 - Locations of RJSealTM Treated and
Untreated Sections

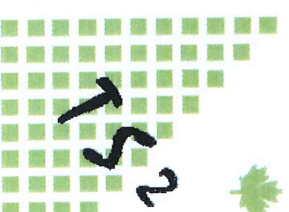

Crown Capital Enterprise Limited.

RJSeal Demonstration

Eastern Harbour Tunnel - HK side Exit

Demo Date

08-Oct-04

Prepared by

Ekman Tang

Updated by

A.G. Speed

Assumptions

Panel Length	19.4	Metres
Panel Width	9.20	Metres
Panel Area	178.5	Sq Metres

Conversion Factors

US Gallon=	3.78	Litres
Sq Metre=	10.76	Sq Feet
Sq Metre=	1.20	Sq Yds
One Litre	1.04	kgs

Crew Consist	No
Labourers	6
Supervisor	1
Total	7

Weather Conditions

Temperature 28 Celsius
Humidity 70%

Rd surface Temp 32 Celsius

Work Schedule	Work Time	No. of Panels	Test Length	Total Area m ²	Total Area	RejuvaSeal Applied			Application Rate			5 Man Crew		
						US gals	litres	kilograms	USGal /yd ²	Litres/m ²	m ² /litre	m ² /Kg	m ² /man hr	yd ² /man hr
am/pm	(hrs)		(m)		yd ²									
00.45-01.15	0.50	1	19.4	178	213	25	95	100	0.117	0.53	1.88	1.78	51.0	61.0
Totals	0.50	1	19.4	178	213	25	95	100	0.117	0.53	1.88	1.78	51.0	61.0

Demo Location

Exit of Eastern Harbour Tunnel to HK side

Road Testing - Water permeability test (15 Oct 04)

10-Nov-04

(Before RJSeal)

Location	Sample No.	Inflow ml/min
Left wheel track	4	480
Right wheel track	6	480
Left wheel track	15	100
Left veh. Lane	18	117

452

685

340

15-Oct-04

10-Nov-04

(After RJSeal)

Sample No.	Inflow ml/min
1	160
3	960
13	685
17	135

436

857

960

Test location refer to picture attached

Fig 7a

Road Testing - Sand Patch Test

Location	Sample No.	(Before RJSeal) 15 Oct 04		
		Diameter of Sand Patch		Texture depth
		D1 (mm)	D2 (mm)	
Left wheel track	4	170	180	175
middle	5	170	165	167.5
Right wheel track	6	160	160	160
Left wheel track	10	180	160	170
middle	11	160	175	167.5
Right wheel track	12	160	160	160
Left wheel track	15	180	190	185
middle	16	180	190	185
Right wheel track	18	160	170	165

Location	Sample No.	(After RJSeal) 15 Oct 04		
		Diameter of Sand Patch		Texture depth
		D1 (mm)	D2 (mm)	
Left wheel track	1	180	180	180
middle	2	160	190	175
Right wheel track	3	170	150	160
Left wheel track	7	190	190	190
middle	8	180	180	180
Right wheel track	9	170	160	165
Left wheel track	13	180	190	185
middle	14	180	190	185
Left wheel track	17	165	170	167.5

Outflow Meter Test

Location	Sample No.	Before RJSeal 15 Oct 04
Left wheel track	10	Time (sec)
Left wheel track	15	4
Right wheel track	18	2

Location	Sample No.	After RJSeal 15 Oct 04
Left wheel track	7	Time (sec)
Left wheel track	13	3
Left wheel track	17	4
		2

Fig 7b

Crown Capital Enterprise Limited.

RJSeal Demo

Eastern Harbour Tunnel - Toll Booth

Demo Date

5-Mar-04

Data from

Albert Yeung

Prepared by

Tony Speed

Revised

10-Jun-04

Weather Conditions

Temperature 16 Celsius
Humidity 73%

Conversion Factors

US Gallon 3.78 Litres
Sq Metre= 10.76 Sq Feet
Sq Metre= 1.20 Sq Yds
Specific Gravity 1.04

Crew

Labourers 1
Supervisor 1
2

Work Time	Time (Hours)	Test Length (m)	Test Width (m)	Total Area m ²	Total Area ft ² approx	Total Area yd ² approx	RejuvaSeal Applied					Application Rate					2 Man Crew	
							US gals	litres	kgs	USGal /ft ²	USGal /yd ²	Litres /m ²	m ² /litre	m ² /kg	m ² /man hr	yd ² /man hr		
13:00 - 13:37	0.63	15	2	30	323	36	1.9	7.2	7.5	0.006	0.053	0.24	4.16	4.00	24.0	28.7		
13:38 - 14:15	0.63	15	2	30	323	36	1.9	7.2	7.5	0.006	0.053	0.24	4.16	4.00	24.0	28.7		
	1.25	30		60	646	72	3.8	14.4	15.0	0.006	0.053	0.24	4.16	4.00	24.0	28.7		